


## Uni-chem® Bend Restrictor



A better way to move the tangent - flex point - away from the end of the coupling system.

- Long lasting ozone resistant EPDM rubber blend
- Uni-chem bend restrictors provide increased service life on hose connections.
- Reduced risk of premature hose wear due to kinking and hose fatigue at tangent point.

*Hose in service; note the gradual bend achieved off of the horizontal connections*

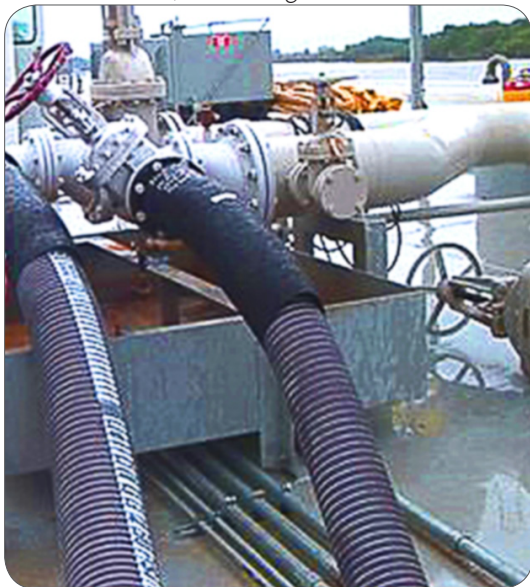

*Hose coiled and placed on pallet; ready for shipment*

Part No.	Hose Size	Description	Actual ID	Actual OD	Wall Ga.	Length
5164BE-07333-FR	4"	EPDM FLEX RESISTOR	4.875"	5.875"	.500"	30"
5164BE-09500-FR	6"	EPDM FLEX RESISTOR	7.333"	8.833"	.750"	36"
5164BE-09500-FR	8"	EPDM FLEX RESISTOR	9.500"	11.00"	.750"	42"

Bromborough, UK	Tel 44.151.334.0873	Fax 44.151.334.7145	
Whitby, ON	Tel 905.666.4970	Fax 905.666.9388	
Indianapolis, IN	Tel 317.334.1444	Fax 317.334.1535	800.526.6288
Haw River, NC	Tel 336.578.2161	Fax 336.578.5554	800.334.4270
Berlin, NJ	Tel 856.768.2275	Fax 856.768.2385	800.225.0215

THE  
**NOVAFLEX®**  
GROUP



Email: [sales@novaflex.com](mailto:sales@novaflex.com)  
Website: [www.novaflex.com](http://www.novaflex.com)